DATE:	TYPE:
PROJECT:	
FIRM :	

EcoSpec®
Linear HP EXT Wall Wash

EcoSense® EcoSpec® Linear HP EXT Wall Wash is an ultra-bright exterior linear white light fixture. Brighter than fluorescent tubes, these flicker-free dimmable fixtures offer an earth-friendly, mercury free cove solution.

Leveraging years of lighting experience, this robust aluminum frame fixture features powerful, energy efficient LEDs and precision constant current circuits for long-life applications.

With smart power technology, EcoSpec® Linear HP EXT Wall Wash connects directly to AC power; simplifying installation and minimizing costs. These long-life fixtures quickly pay for themselves in energy savings and maintenance costs, providing substantial savings over the 50,000 hour life of the lamp.

Features

- Dimmable
- Flicker-Free
- In-line Connection
- Long Life
- Instant On
- RoHS Compliant
- Lead Free
- Mercury Free
- No UV

ECOSENSE®

Specifications

Color Temperature	**Lumen Output**
2700K	605 lm/LF : 605 (1') / 1210 (2') / 1815 (3') / 2420 (4')
3000K	655 lm/LF : 655 (1') / 1310 (2') / 1965 (3') / 2620 (4')
4000K	705 lm/LF : 705 (1') / 1410 (2') / 2115 (3') / 2820 (4')
Color Rendering Index	80
Rated Life	50,000 hours
Beam Angle	6°x 6° / 10°x 60° / 17°x 35° / 30°x 60°
Power Consumption	17W/LF - 17W(1ft)/34W(2ft)/52W(3ft)/69W(4ft)
Efficacy (lm/W)	35@2700K / 37@3000K / 40@4000K
Maximum Fixture Run Length	40' @ 120VAC / 90' @ 220VAC
Operating Temperature	14°F to 122°F (-10°C to 50°C)
Operating Voltage	100-120VAC, 220-240VAC, 50-60Hz
Dimming	ELV type, trailing edge dimmers
Housing	Aluminum; Clear Polycarbonate Lens
Fixture Connectors	Integral male / female 3-pin connectors
Rating	IP66
Warranty	3 Years
Weight	x oz/x g (2ft) / x oz/x g (3ft) / x oz/x g (4ft)
Dimensions	W 2.24" x H 2.43" x L 24"/36"/48" (56,9 mm x 61,8 mm x 609 mm/914 mm/1,219 mm)
Certifications	UL, c UL, CE, RoHS COMPLIANT

Restriction of Hazardous Substances Directive (RoHS) implements EU Directive 2002/95 which bans placing electrical and hazardous equipment that contains more than agreed levels of hazardous substances on the EU market. For a list of these substances visit www.rohs.gov.uk.

PRELIMINARY

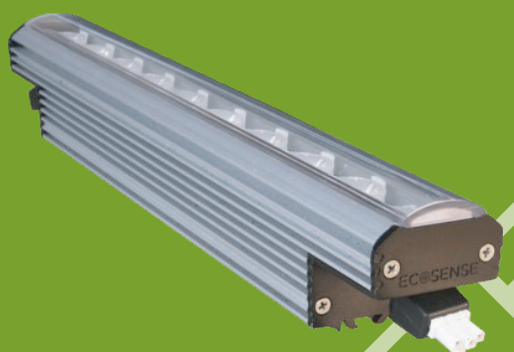

Dimensions

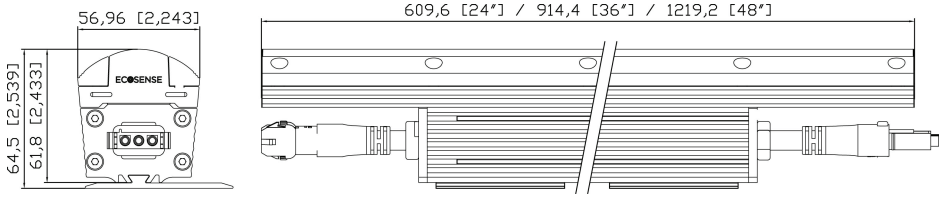

www.ecosenselighting.com

EcoSense® Lighting Inc.
80 Broad Street
5th Floor
New York, NY 10004

www.ecosenselighting.com

Phone 212-228-8118
Fax 212-228-9113
Toll Free 888.632.6736
888.6.ECOSEN

ENERGY STAR PARTNER

(V. 5.2-2011)

DATE:	TYPE:
PROJECT:	
FIRM :	

EcoSpec®
Linear HP EXT Wall Wash

Ordering Information

Choose the option that best suits your needs and write its corresponding code on the appropriate line to form the product code.

11LC - - - -

MODEL	LENGTH	COLOR	VOLTAGE	OPTIC
11LC	**12** - 1′-0″	**27** - 2700K	**120** - 100-120VAC	**6** - 6° x 6°
	24 - 2′-0″	**30** - 3000K	**220** - 220-240VAC	**10** - 10° x 60°
	36 - 3′-0″	**40** - 4000K		**17** - 17° x 35°
	48 - 4′-0″			**30** - 30° x 60°

Order mounting and wiring accessories as separate catalogue numbers from the **Accessories** section below.

EXAMPLE: 11LC-24-30-120-6

Accessories

Wiring

Leader Cable 10′-0″ (UL)*	**EXT-A-CBL-120-10**	Leader Cable 10′-0″ (CE)*	**EXT-A-CBL-220-10**
Jumper Cable 1′-0″ (UL)	**EXT-A-JMP-120-1**	Jumper Cable 1′-0″ (CE)	**EXT-A-JMP-220-1**
Jumper Cable 5′-0″ (UL)	**EXT-A-JMP-120-5**	Jumper Cable 5′-0″ (CE)	**EXT-A-JMP-220-5**

[* One (1) terminator is included standard with each Leader Cable]

Mounting

Adjustable Hinged Clips	**11-A-MNT-ADJ**
Flat Mounting Plate	**10-A-MNT-FLAT (Included with each product length.)**

PRELIMINARY

© 2011 EcoSense® Lighting Inc. All rights reserved.
Specifications subject to change without notice.
Visit www.ecosenselighting.com for the most current specifications.
EcoSense, the EcoSense logo, and EcoSpec are registered trademark of EcoSense Lighting Inc.